

## Figures

09E22003-070601  
T09070" E002B950

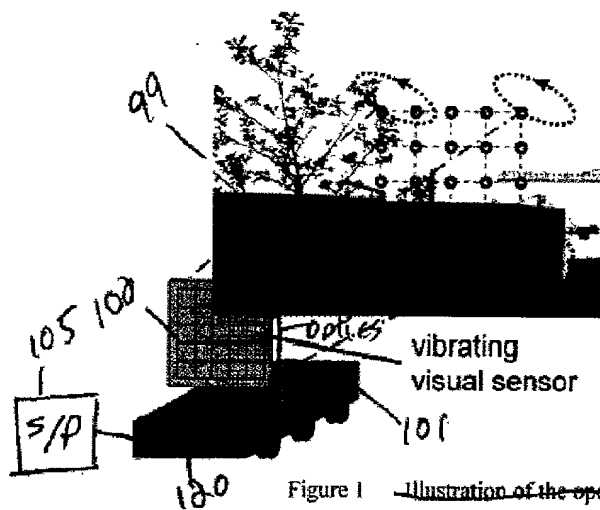


Figure 1 Illustration of the operating principle of the invention

signal from one photoreceptor:

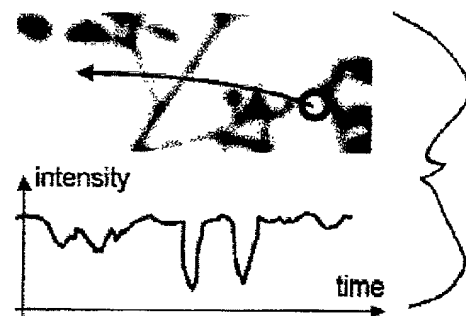
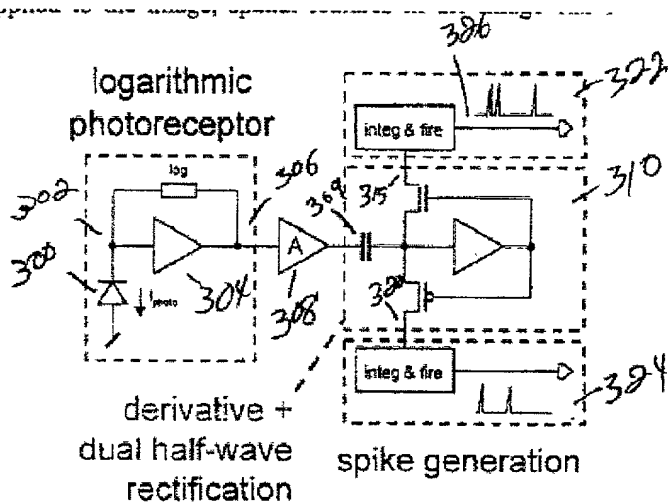


FIG 2

09582003-070501  
109070-00028960

and remaining pulse applied to the input of the  
pulses.

FIG 3



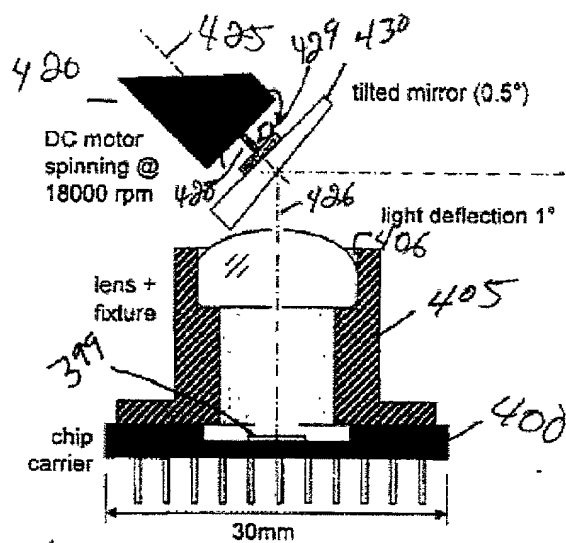


Figure 4 Sketch of a scanning device based on a spinning tilted mirror

09682003-070601

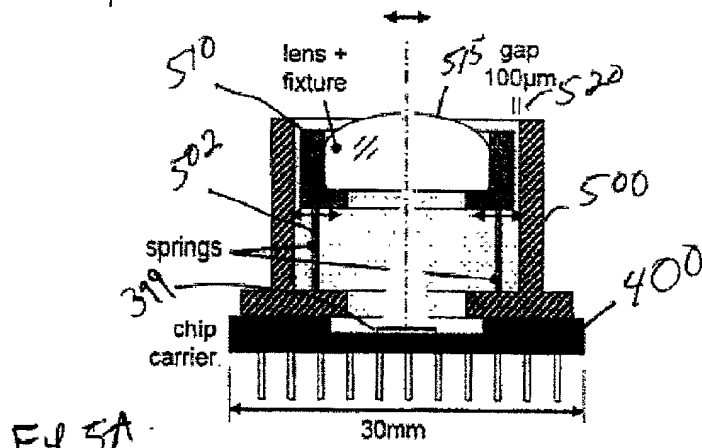
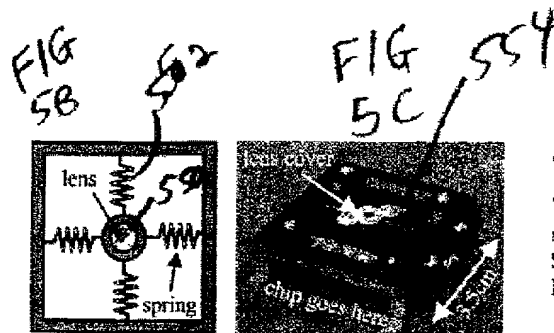


Fig 5A  
Figure 5A Sketch of a scanning device based on a lens mounted on springs




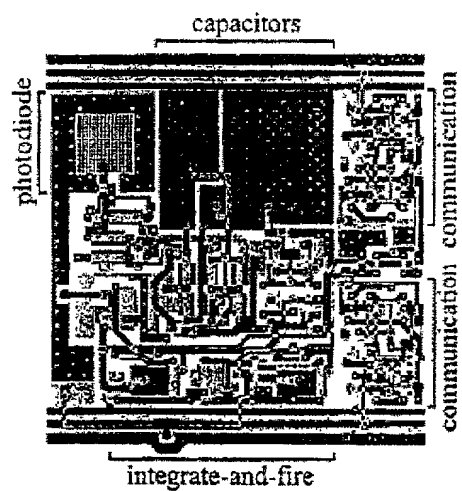



Fig. 6. Layout of a single pixel ( $168.5\mu\text{m}$  by  $68.5\mu\text{m}$ )

09682003-070604



2025-07-09 10:00:00

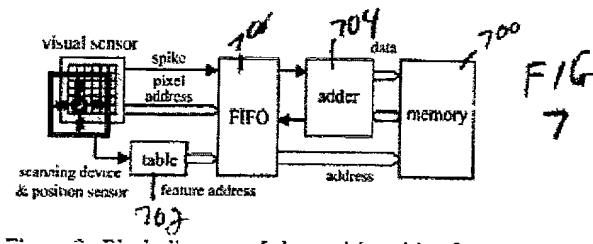



09682003-070604

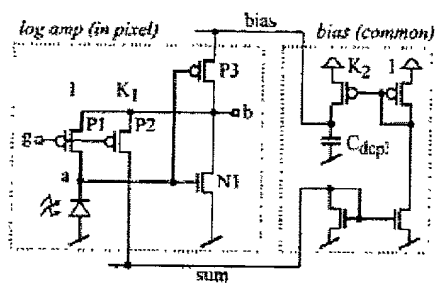


FIG 8Q